



**24** hours  
**BUILT TO WORK**  
[www.staxx-mhe.com](http://www.staxx-mhe.com)






# ● MAINTENANCE SO EASY !!



**5 YEAR WARRANTY CHASSIS**



**Brushless drive motor, maintenance free**



**Lithium battery maintenance free**



**Recharge Alert**



**Error code display**



**6s Replace Battery**



**60s Replace Drive Wheel**

# ● PERFORMANCE



**Traveling speed**

— **UNLADEN** 5Km/h

+ **LADEN** 4Km/h 3.5Km/h

Model: PPT15H



Model: PPT15H

**Gradeability**





# CHARACTERISTICS

Closer look into



## SMART FUNCTION

01

### Turtle Speed

Horn Release Pressed & Forward 2 Times



## SMART FUNCTION

02

### Up-Right Drive

Reverse Button & Forward Throttle Remain Pressed, Power On




## SMART FUNCTION

03



### Engineering Mode

(for all Forks use)  
Horn Release Pressed, Power On



⚠ In up-right drive mode, vehicle will move when handle is operated at any position. Please avoid misoperation.

⚠ Brake release mode is only for emergencies, not allowed for vehicle with normal conditions.

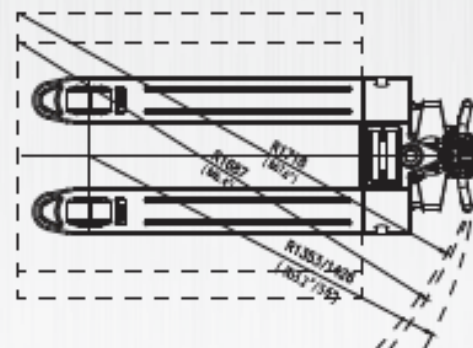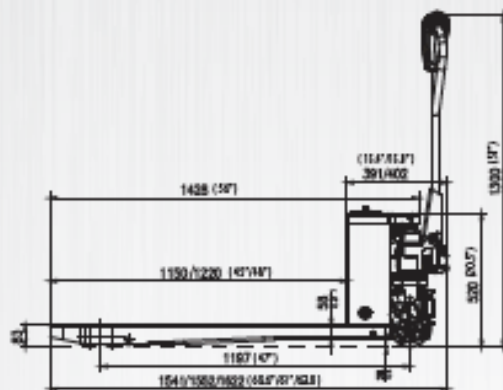

MODEL		PPT18H	PPT18HQ	EPT15H		PPT40H	PPT40HQ	EPT33H	
<b>CHARACTERISTICS</b>									
1.1 Capacity	kg	1800	1800	1500	lb	4000	4000	3300	
1.2 Load center	mm	600	600	600	In	23.6	23.6	23.6	
1.3 Standard overall fork width	mm	550/685	550/685	550/685	In	21.6/27	21.6/27	21.6/27	
1.4 Fork length	mm	1150/1220	1150/1220	1150/1220	In	45/48	45/48	45/48	
1.5 Overall length	mm	1552/1622	1552/1622	1552/1622	In	61/63.8	61/63.8	61/63.8	
1.6 Overall height (with tiller)	mm	1300	1300	1300	In	51	51	51	
1.7 Rear body width	mm	550/685	550/685	550/685	In	21.6/27	21.6/27	21.6/27	
1.8 Minimum turning radius	mm	1353/1426	1353/1426	1353/1426	In	53.2/56	53.2/56	53.2/56	
<b>PERFORMANCE</b>									
2.1 Max.Traveling speed	laden	km/h	3.5	3.5	4	mph	2.2	2.2	2.5
	unladen	km/h	5	5	5	mph	3.1	3.1	3.1
2.2 Gradeability	laden	%	5	5	6	%	5	5	6
	unladen	%	20	20	20	%	20	20	20
2.3 Traveling	kw	DC 0.75 Brushless	DC 0.75 Brushless	DC 0.75 Brushless	kw	DC 0.75 Brushless	DC 0.75 Brushless	DC 0.75 Brushless	
2.4 Lifting	kw	Hydraulic	QUICK LIFT	DC 0.5	kw	Hydraulic	QUICK LIFT	DC 0.5	
<b>BATTERY</b>									
4.1 Voltage	v	48	48	48	v	48	48	48	
4.2 Capacity/type	Ah	10 Ah Lithium	10 Ah Lithium	10 Ah Lithium	Ah	10 Ah Lithium	10 Ah Lithium	10 Ah Lithium	
<b>BRAKE TYPE</b>									
5.1 Travel brake		Regenerate	Regenerate	Regenerate		Regenerate	Regenerate	Regenerate	
5.2 Brake		Electromagnetic	Electromagnetic	Electromagnetic		Electromagnetic	Electromagnetic	Electromagnetic	
<b>CONTROLLER</b>									
6.1 Controller		STAXXB1501	STAXXB1501	STAXXB1501		STAXXB1501	STAXXB1501	STAXXB1501	

**| MAKE**  
**YOUR JOB**  
**EASIER!**

